
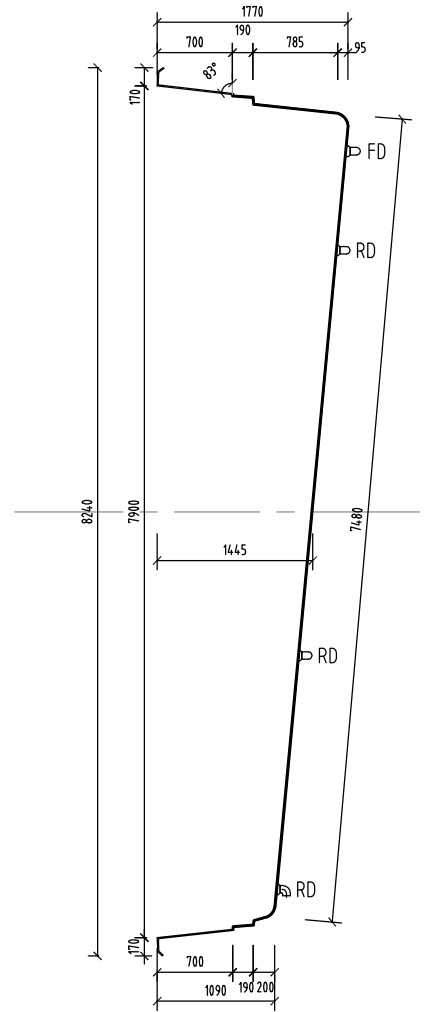
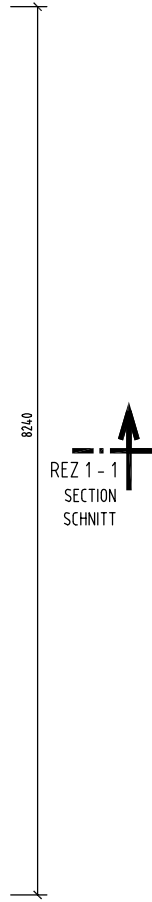



POHLAD ZHORA M 1:50

TOP ELEVATION
OBERANSICHT

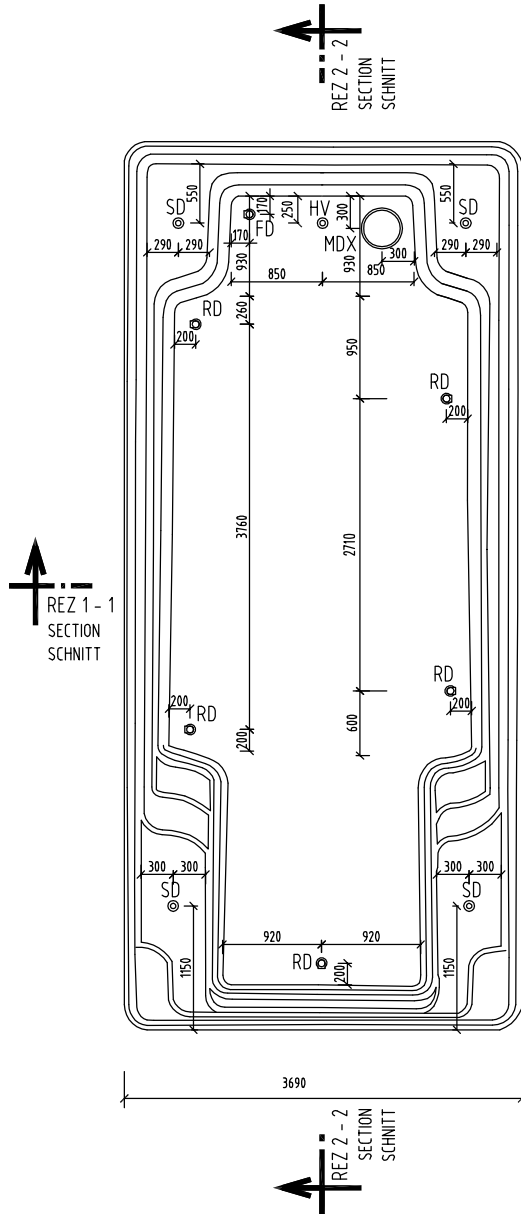

REZ 1-1 M 1:50

CROSS SECTION
QUERSCHNITT

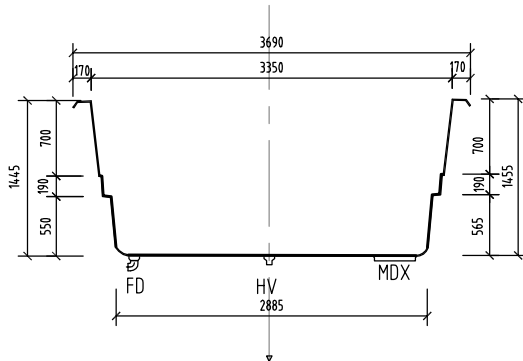

- MDX - DNOVÁ VÝPUSŤ / BOTTOM OUTLET / BODENAUFLAUF 1x
HV - HYDROSTATICKÝ VENTIL / HYDROSTATIC VALVE / HYDROSTATISCHE VENTIL 1x
FD - FIXNÁ DÝZA / FIXED NOZZLE / FESTEN DUSE 1x
RD - ROTAČNÁ DÝZA / ROTATED NOZZLE / ROTATION DUSE 5x
SD - SCHODOVÁ DÝZA / STAIR NOZZLE / TREPPE DUSE 4x

POZNÁMKA / NOTE / ANMERKUNG:

HRŮBKA STENY BAZÉNA JE CCA. 10 MM
TOLERANCIA PREZNOSTI 7 - 10 MM

THICKNESS OF THE SIDEWALL OF SWIMMING POOL IS APX. 10 MM.
MEASURED WITH TOLERANCE RATE 7 - 10 MM


DIE SCHWIMMBADWAND DÜCKE IS CA. 10 MM.
DUCKENTOLERANZ IST 7 - 10 MM.

NÁZOV VÝKRESU / TECHNOLOGISCHE HOLES / ZEICHNUNG NAME:

X-TRAINER 82 TECHNOLOGICKÉ PRESTUPY

TECHNOLOGICAL HOLES
VENTAGE VERSION

TECHNOLOGISCHE HOLES
VENTAGE VERSION

Compass 	
Ceramic Pools Europe	
www.compasspools.eu	
KRESLIL: ING. PETER KALETA	DÁTUM: 12/2013
ČÍSLO: 3	VERZIJA: 1
VERZIJA: 1	VERZIJA: 1