


POHLAD ZHORA M 1:50

TOP ELEVATION
OBERANSICHT

↑
REZ 1 - 1
SECTION
SCHNITT

ALTERNATIVA
ALTERNATIVE

←
REZ 2 - 2
SECTION
SCHNITT

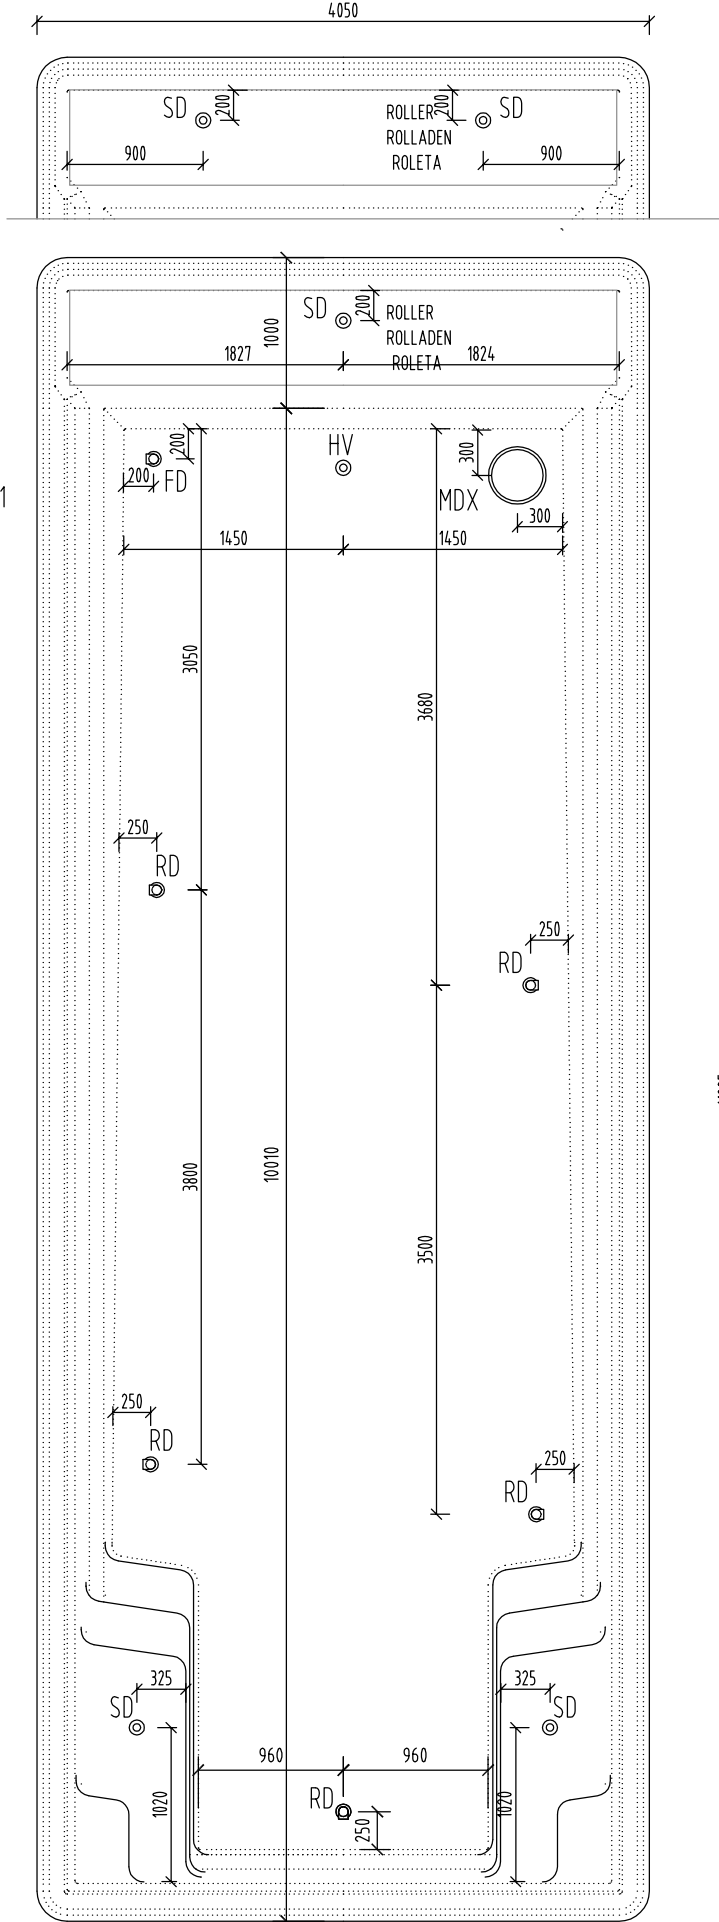


↑
REZ 1 - 1
SECTION
SCHNITT

11005

REZ 2 - 2 M 1:50


LONGITUDINAL SECTION
QUERSCHNITT

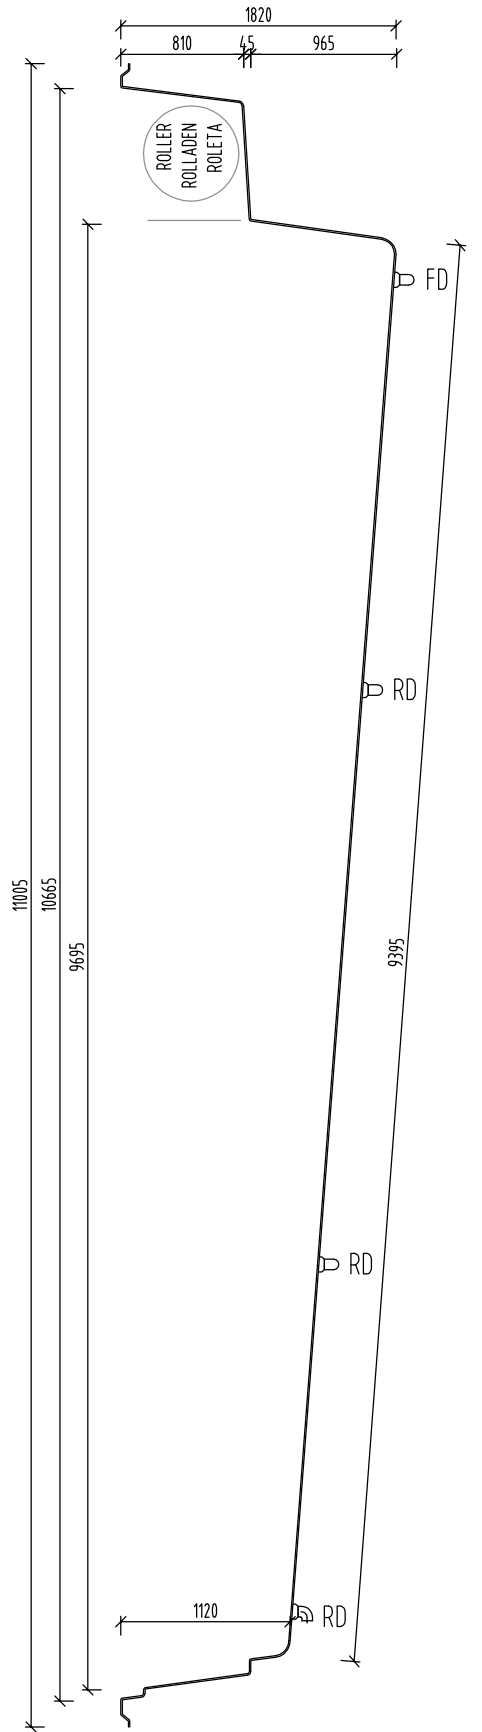

←
REZ 2 - 2
SECTION
SCHNITT

REZ 1 - 1 M 1:50

CROSS SECTION
QUERSCHNITT

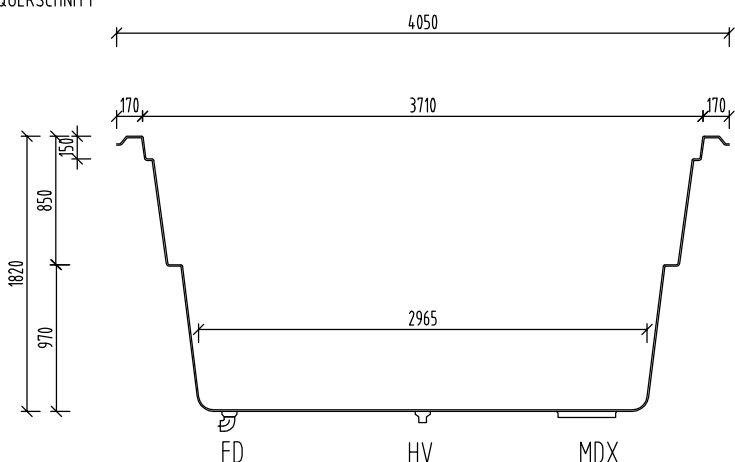

POZNÁMKA / NOTE / ANMERKUNG :

HRÚBKBA STENY BAZÉNA JE CCA. 10 MM
TOLERANCIA PRESNOSTI 7 - 10 MM

THICKNESS OF THE SIDEWALL OF SWIMMING POOL IS APX. 10 MM.
MEASURED WITH TOLERANCE RATE 7 - 10 MM

DIE SCHWIMMBADWAND DUCKE IS CA. 10 MM.
DUCKENTOLERANZ IST 7 - 10 MM.

- MDX - DNOVÁ VÝPUŠŤ / BOTTOM OUTLET / BODENAUSLAUF 1x
- HV - HYDROSTATICKÝ VENTIL / HYDROSTATIC VALVE / HYDROSTATISCHE VENTIL 1x
- FD - FIXNÁ DÝZA / FIXED NOZZLE / FESTEN DUSE 1x
- RD - ROTAČNÁ DÝZA / ROTATED NOZZLE / ROTATION DUSE 5x
- SD - SCHODOVÁ DÝZA / STAIR NOZZLE / TREPPE DUSE 3-4x

NÁZOV VÝKRESU / TECHNOLOGISCHE HOLES / ZEICHNUNG NAME:-

**XL TRAINER 110
TECHNOLOGICKÉ PRESTUPY**

**TECHNOLOGICAL HOLES
VENTAGE VERSION**

**TECHNOLOGISCHE HOLES
VENTAGE VERSION**

Compass
Ceramic Pools Europe

www.compasspools.eu

KRESLIL: DRAWER / ZEICHNER:	ING. PETER KALETA	DÁTUM: DATUM / DATUM:	12/2013
MIERKA: SCALE/MASSTABE:	1:50	FORMÁT DRAWING FORMAT / ZEICHNUNG FORMAT:	A3
VERZIA: VERSION: VERSION:	4	ČÍSLO DRAWING NUMBER: ZEICHNUNG NUMBER:	4